1227133

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

September 17, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: *60/495,990*
FILING DATE: *August 18, 2003*
RELATED PCT APPLICATION NUMBER: *PCT/US04/26850*

Certified by

Jon W Dudas

Acting Under Secretary of Commerce
for Intellectual Property
and Acting Director of the U.S.
Patent and Trademark Office

PTO/SB/16 (08-03)
Approved for use through 07/31/2006. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. ER054908880US

INVENTOR(S)		
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)
Kenneth Alan	Soellner	Troy, Ohio

Additional inventors are being named on the _____ *separately numbered sheets attached hereto*

TITLE OF THE INVENTION (500 characters max)

BRAKE ADJUSTING MECHANISM

Direct all correspondence to: **CORRESPONDENCE ADDRESS**

☑ Customer Number: 23908

OR

☐ Firm or Individual Name					
Address					
Address					
City		State		Zip	
Country		Telephone		Fax	

ENCLOSED APPLICATION PARTS *(check all that apply)*

☑ Specification *Number of Pages* 11 ☐ CD(s), Number _____

☑ Drawing(s) *Number of Sheets* 3 ☑ Other (specify) Rtrn PC, Cert Mail

☐ Application Date Sheet. See 37 CFR 1.76

METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT

☐ Applicant claims small entity status. See 37 CFR 1.27.

☑ A check or money order is enclosed to cover the filing fees.

☐ The Director is herby authorized to charge filing fees or credit any overpayment to Deposit Account Number: _____

☐ Payment by credit card. Form PTO-2038 is attached.

FILING FEE Amount ($): 160.00

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☑ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: _____

Respectfully submitted,

SIGNATURE Christopher B. Jacobs

TYPED or PRINTED NAME Christopher B. Jacobs

TELEPHONE 216-621-1113

Date August 18, 2003

REGISTRATION NO. 37,853 *(if appropriate)*

Docket Number: BFGRP0325US

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

BFGRP0325US

CERTIFICATE OF MAILING

I hereby certify that this paper (along with any paper or item referred to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR 1.10. with the below indicated mailing label number, addressed to MS Provisional Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Date: August 18, 2003

Jennifer A. Moore

Mailing Label Number: ER054908880US

BRAKE ADJUSTING MECHANISM

Field of the Invention

This invention relates to adjusting mechanisms for automatically maintaining a uniform release clearance (and therefore a uniform stroke) for brakes and similar equipment. Mechanisms of this type are commonly used in brake systems to compensate for wear of the brake linings and other brake parts and are popularly called "automatic brake adjusters." Although the present invention is explained herein in connection with brakes, the mechanism has utility in other environments where similar wear compensation is needed such as in clutches.

Background of the Invention

Brakes heretofore have included mechanical adjusters with special ratchets or friction dragging parts to provide adjustment for wear. Hydraulic adjusters utilizing the metering of hydraulic fluid and adjusters with deformable tubes have also been used.

Also known are mechanical adjusters in which a deforming member is pulled through a ductile deformable tube. These adjusters have the advantage of low cost and reliability. Notwithstanding, there has been a problem of nonuniform resistance to deformation of the tube over its entire length. The deformable tube tends to deform more easily at its longitudinal end portions as opposed to its more central portions.

U.S. Patent No. 4,171,036 discloses a brake adjuster assembly that includes a tube having an axial slot extending the length thereof that allows for radial expansion of the tube as a deforming member is pulled therethrough. As described, the tube need not be made of a material having any special ductility for expansion and such tube with minor changes can be used for adjusters where the

adjusting force is either low or high. Progressive axial movement of a ball in the tube results in progressive expansion of the tube by separation at the slot. The tube also has a flange, a "V" notch or a rough inner surface on its longitudinal end portions to increase resistance to the ball that progresses axially through the tube, thereby giving the tube over its entire length a more uniform resistance to movement of the ball.

Although the split tube of this patent was used, it was not as successful as a "continuous tube," like those disclosed in later U.S. Patent Nos. 5,219,046 and 5,538,109.

Definitions

As used herein, a "continuous tube" is a tubular member that does not have an axial slot or separation extending continuously along the "operative length" thereof. The "operative length" of the tubular member is the length of the tubular member that is intended to be radially expanded by a deforming member in providing adjustment for wear. A "continuous tube" as referred to herein can have openings or separations spaced along the operative length of the tubular member, provided they do not form an axial slot or separation extending continuously along the operative length of the tubular member. A "solid continuous tube" herein means a continuous tube which does not have any opening or separations along the operative length thereof.

Summary of the Invention

The present invention provides an adjuster assembly for automatically maintaining a uniform release clearance (and therefore a uniform stroke) for brakes and similar equipment. The adjuster assembly comprises a continuous tube and an expansion member together having a combined length controlling the release clearance of selectively engageable friction parts. The expansion member has an expansion device frictionally engaging the interior of the

continuous tube to effect progressive circumferential expansion of the continuous tube when the expansion device is axially drawn through the continuous tube to compensate for wear of the friction parts during actuation and release of said selectively engageable parts. Unlike prior art adjuster assemblies, the continuous tube advantageously has an end portion processed differently from the balance of the continuous tube for extending the usable portion of the continuous tube.

In a preferred embodiment, the end portion of the continuous tube is shaped to provide over a portion thereof a load resistance essentially equal the load resistance of a cylindrical portion of the continuous tube adjacent the flared end portion. To this end, the end portion is radially inwardly flared, as by swaging, for extending the usable portion of the continuous tube, although other configurations are contemplated. The continuous tube preferably is a solid continuous tube that is cylindrical and the end portion preferably is uniformly radially inwardly flared.

The invention also provides a brake system comprising a plurality of friction discs located between a pressure plate and a reaction plate, an actuating mechanism operative for moving the pressure plate toward the friction discs and the reaction plate, and an adjuster assembly as set forth in claim 1 for compensating for wear of the friction discs.

The foregoing and other features of the invention are hereinafter fully described and particularly pointed out in the claims, the following description and annexed drawings setting forth in detail a certain illustrative embodiment of the invention, this embodiment being indicative, however, of but one of the various ways in which the principles of the invention may be employed.

Brief Description of the Drawings

FIG. 1 is a cross-sectional view of an aircraft wheel and brake assembly with a piston actuator employing a prior art brake adjustor assembly.

FIG. 2 is a cross-sectional view of the piston actuator employing a brake adjustor assembly according to the present invention.

FIG. 3 is a cross-sectional view of the piston actuator after substantial wear of the brake has been taken up by the brake adjustor assembly.

Detailed Description

Referring to the drawings, wherein like reference numerals designate like or corresponding parts throughout the several views, there is shown in FIG. 1 a prior art friction brake mechanism 10 for use with a wheel 11. The brake mechanism and wheel form a wheel and brake assembly 12 particularly suited for use in an aircraft. As shown, the wheel is rotatably mounted by bearings 13 on an axle 14 that can be connected to a landing gear strut or truck in a conventional manner.

The brake mechanism 10 includes a piston housing 27 supported on the axle 14 in a conventional manner. The piston housing 27 has a plurality of circumferentially spaced bores 28 that receive cylinders 29 within which are slidably mounted pistons 30. The piston housing 27 has secured thereto a torque tube 32 that has an annular and radially outwardly extending reaction member (not shown) at its end opposite the piston housing.

The torque tube 32 has a plurality of circumferentially spaced splines or spline members 35 which are axially extending. The wheel 11 has attached thereto a plurality of circumferentially spaced spline members 37 at its inner peripheral surface. The spline members 35 support an axially nonrotatable end disc or pressure plate 38 and inner nonrotatable stator discs 39, 40 and 41. The end disc 38 and stator discs 39, 40 and 41 have slotted openings at circumferentially spaced locations on the inner periphery for captive engagement by the spline members 35 as is old and well known in the art. Such discs 38, 39, 40 and 41 constitute the stators for the friction brake 10. As is conventional, the

previously mentioned reaction member acts in concert with the stator discs. A plurality of axially spaced rotor discs 44, 45 and 46 are interspaced or interleaved between the stator discs 38 through 41. The rotor discs have a plurality of circumferentially spaced openings along their outer periphery for engagement by the corresponding spline members 37 as is old and well known in the art. All of the stator discs 38 through 41 and rotor discs (44 through 46) can be made from a suitable brake material or materials such as metal, steel or other wear-resistant material for withstanding high temperatures and providing a heat sink. The number of discs may be varied as is necessary for the application involved.

The pistons 30 previously referred to are all identical in structure. When the pistons are extended, hydraulically in the illustrated embodiment, they push the stator and rotor discs together and toward the reaction member, whereupon the stators and rotor discs are squeezed together to effect braking. Braking force is released by retracting the pistons. Preferably the pistons are backed off from the pressure plate 38 by a prescribed amount (running clearance). Unless compensated for, the running clearance will increase as the stator and rotor discs wear, as the combined axial thickness thereof will decrease as they wear. Some mechanism is needed to compensate for such wear in order to keep the piston stroke relatively the same regardless of the extent of wear, as is desired. In FIG. 1, the piston 30 is shown with a prior art wear adjustor assembly and details thereof can be obtained by reference to U.S. Patent No. 5,538,109, which is hereby incorporated herein by reference.

Turning now to FIGS. 2 and 3, the piston 30 is shown with a wear adjusting mechanism 48 according to the present invention. Accordingly, details of the piston 30 and the wear adjusting assembly 48 shown in FIGS. 2 and 3 will now be described.

The piston 30 is a cup-shaped sleeve with a rearwardly disposed end portion 49 which is suitably recessed to receive an annular seal 50 which slidingly engages the interior wall surface of cylinder 29. The other or front end portion of

piston 30 has a piston head 51 suitably connected to the sleeve portion of piston 30. The area between an end wall portion 56 of cylinder 29 and the rearwardly disposed end portion 49 of piston 30 define a chamber which receives pressurized fluids from a suitable pressure source via inlet conduits to move the piston 30 and the piston head 51 against the pressure plate 38 to effect a braking action of the brake stack wherein the interleaved stator and rotor discs are frictionally engaged with each other and against the reaction member.

The wear adjusting mechanism 48 comprises a rod 58 and a continuous tube 62. The end wall portion 56 of cylinder 29 as shown in FIG. 2 receives an enlarged head 57 of the rod 58 that extends through the rearwardly disposed end portion 49 of the piston 30. The other end of rod 58 has an expansion member formed by a hardened ball 60 secured thereto as by a nut for engagement with the continuous tube 62. The continuous tube is connected to a tubular member 64 which is encompassed by a compression spring 65. The tubular member 64 and continuous tube 62 are axially coextensive for the most part. The tubular member 64 has a flange 66 and the spring 65 is interposed between the flange 66 and the end wall portion 49, whereby the flange is biased against a retaining ring 67 fixed to the piston. The spring functions to urge the piston 30 against the flange of the tubular member 64 which functions as a retraction stroke stop for the piston.

In use, the pressure is applied to the back side of the piston 30 to extend the piston. Initially the piston will move to take up any clearance after which the piston will engage the pressure plate 38 (FIG. 1) to squeeze together the interleaved stator and rotor discs to effect braking. As clamping pressure is applied, the pressure will increase to a point where it equals the force of the spring 65 that holds the piston against the flange of the tubular member 64. After this point, the piston will move forwardly relative to the tubular member 64 until the bottom of the end wall portion 49 of the piston 30 engages a rear end 68 of the tubular member 64, whereupon the piston and tubular member will move forward together. As the piston and tubular member move forward together, the

tubular member also advances the continuous tube 62, which engages the hardened ball 60. If the force exerted exceeds the resistance of the continuous tube 62 to movement of the ball 60, the ball will deform the continuous tube radially outwardly as it is drawn through the tube. If there has been no wear of the brake discs, the piston will not extend to a point that will cause the ball to move through the continuous tube. If there has been wear, the piston will move further than it did during a prior braking operation, thereby causing the ball to be drawn through the tube by an amount equal to the extent by which the piston extended during the last braking operation.

Upon removal of pressure from the back side of the piston 30, the spring 65 will cause the piston to retract until the piston once again bottoms against the end wall portion 56 of the cylinder 29. This will reestablish a prescribed clearance during the time when the brake is not applied. In FIG. 3, the piston is shown in a position corresponding to a substantial amount of wear of the brake discs.

In the past, continuous tubes similar to the continuous tube 62 were cylindrical along the operative length thereof. As the ball neared the end of the continuous tube, the resistance to movement of the ball would decrease because of a reduction in hoop strength of the tube. In accordance with the present invention, the end portion 70 of the continuous tube 62 is processed to increase the hoop strength or otherwise increase the resistance to travel of the ball at the end portion of the continuous tube, thereby to extend the usable portion of the continuous tube. The end portion of the continuous tube can be processed to give the tube over its entire length a more uniform resistance to movement of the ball.

As shown in FIG. 2, the end portion 70 of the continuous tube 62 preferably is radially inwardly flared, as by swaging, for extending the usable portion of the continuous tube, although other configurations are contemplated. The continuous tube preferably is a solid continuous tube that is cylindrical and the end portion progressively decreases in diameter as it approaches its terminal

end. Most preferably, the end portion is uniformly radially inwardly flared with a convex curvature as shown in FIG. 2.

Although the invention has been shown and described with respect to certain illustrated embodiments, equivalent alterations and modifications will occur to others skilled in the art upon reading and understanding the specification and the annexed drawings. In particular regard to the various functions performed by the above described integers (components, assemblies, devices, compositions, etc.), the terms (including a reference to a "means") used to describe such integers are intended to correspond, unless otherwise indicated, to any integer which performs the specified function (i.e., that is functionally equivalent), even though not structurally equivalent to the disclosed structure which performs the function in the herein illustrated embodiments of the invention. In addition, while a particular feature of the invention may have been described above with respect to only one of several illustrated embodiments, such a feature may be combined with one or more other features of the other embodiment, as maybe desired and advantageous for any given or particular application.

What is claimed is:

1. An adjuster assembly for adjusting the release clearance between selectively engageable friction parts to compensate for wear in such parts, comprising a continuous tube and an expansion member together having a combined length controlling the release clearance of the selectively engageable friction parts, the expansion member having an expansion device frictionally engaging the interior of the continuous tube to effect progressive circumferential expansion of the continuous tube when the expansion device is axially drawn through the continuous tube to compensate for wear of the friction parts during actuation and release of said selectively engageable parts, and the continuous tube having an end portion processed differently from the balance of the continuous tube for extending the usable portion of the continuous tube.

2. An adjuster assembly as set forth in claim 1, wherein the end portion of the continuous tube is shaped to provide over a portion thereof a load resistance essentially equal the load resistance of a cylindrical portion of the continuous tube adjacent the flared end portion.

3. An adjuster assembly as set forth in claim 2, wherein the end portion is radially inwardly flared for extending the usable portion of the continuous tube.

4. An adjuster assembly as set forth in claim 3, wherein the continuous tube is a solid continuous tube.

5. An adjuster assembly as set forth in claim 4, wherein the solid continuous tube is cylindrical and the end portion is uniformly radially inwardly flared.

6. An adjuster assembly as set forth in claim 1, wherein the end portion is radially inwardly flared for extending the usable portion of the continuous tube.

7. An adjuster assembly as set forth in claim 6, wherein the continuous tube is a solid continuous tube.

8. An adjuster assembly as set forth in claim 7, wherein the solid continuous tube is cylindrical and the end portion is uniformly radially inwardly flared.

9. A brake system comprising a plurality of friction discs located between a pressure plate and a reaction plate, an actuating mechanism operative for moving the pressure plate toward the friction discs and the reaction plate, and an adjuster assembly as set forth in claim 1 for compensating for wear of the friction discs.

R:\BFGC\BFGR\P\P0325\P0325US.PAT.wpd

Abstract

An adjuster assembly for automatically maintaining a uniform release clearance (and therefore a uniform stroke) for brakes and similar equipment. The adjuster assembly comprises a continuous tube and an expansion member together having a combined length controlling the release clearance of selectively engageable friction parts. The expansion member has an expansion device frictionally engaging the interior of the continuous tube to effect progressive circumferential expansion of the continuous tube when the expansion device is axially drawn through the continuous tube to compensate for wear of the friction parts during actuation and release of said selectively engageable parts. Unlike prior art adjuster assemblies, the continuous tube advantageously has an end portion processed differently from the balance of the continuous tube for extending the usable portion of the continuous tube.

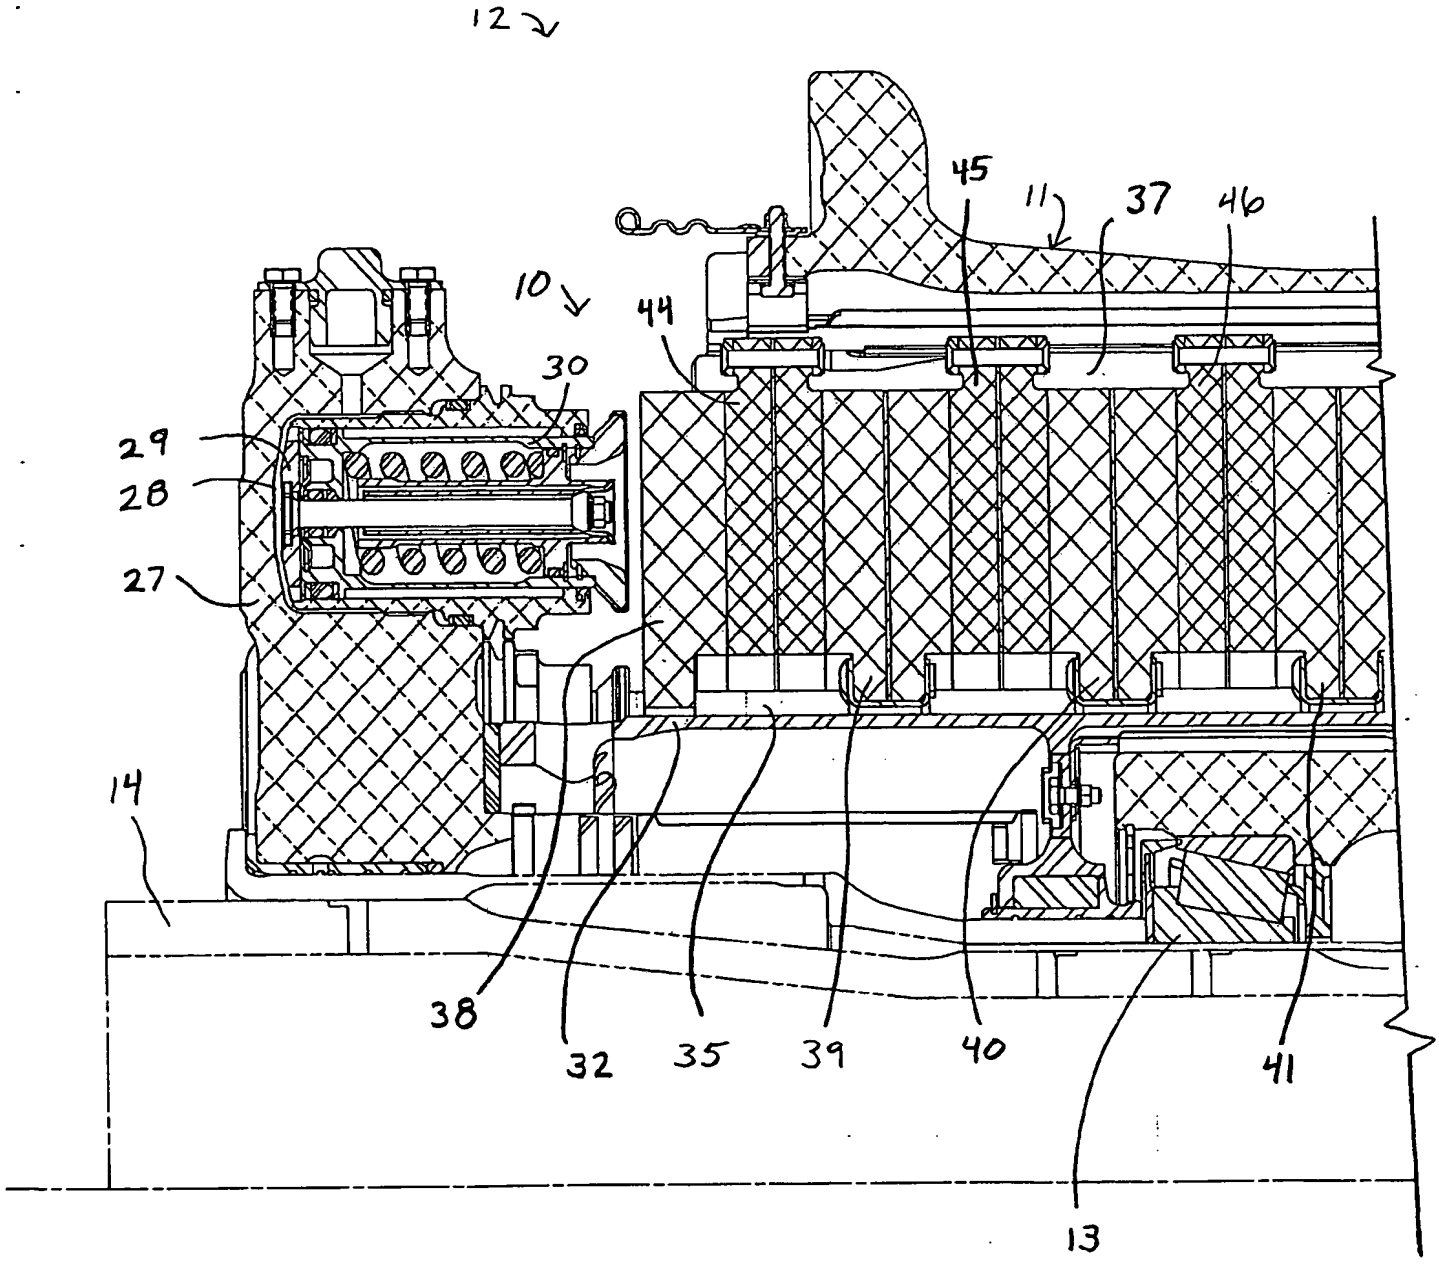

FIG. 1

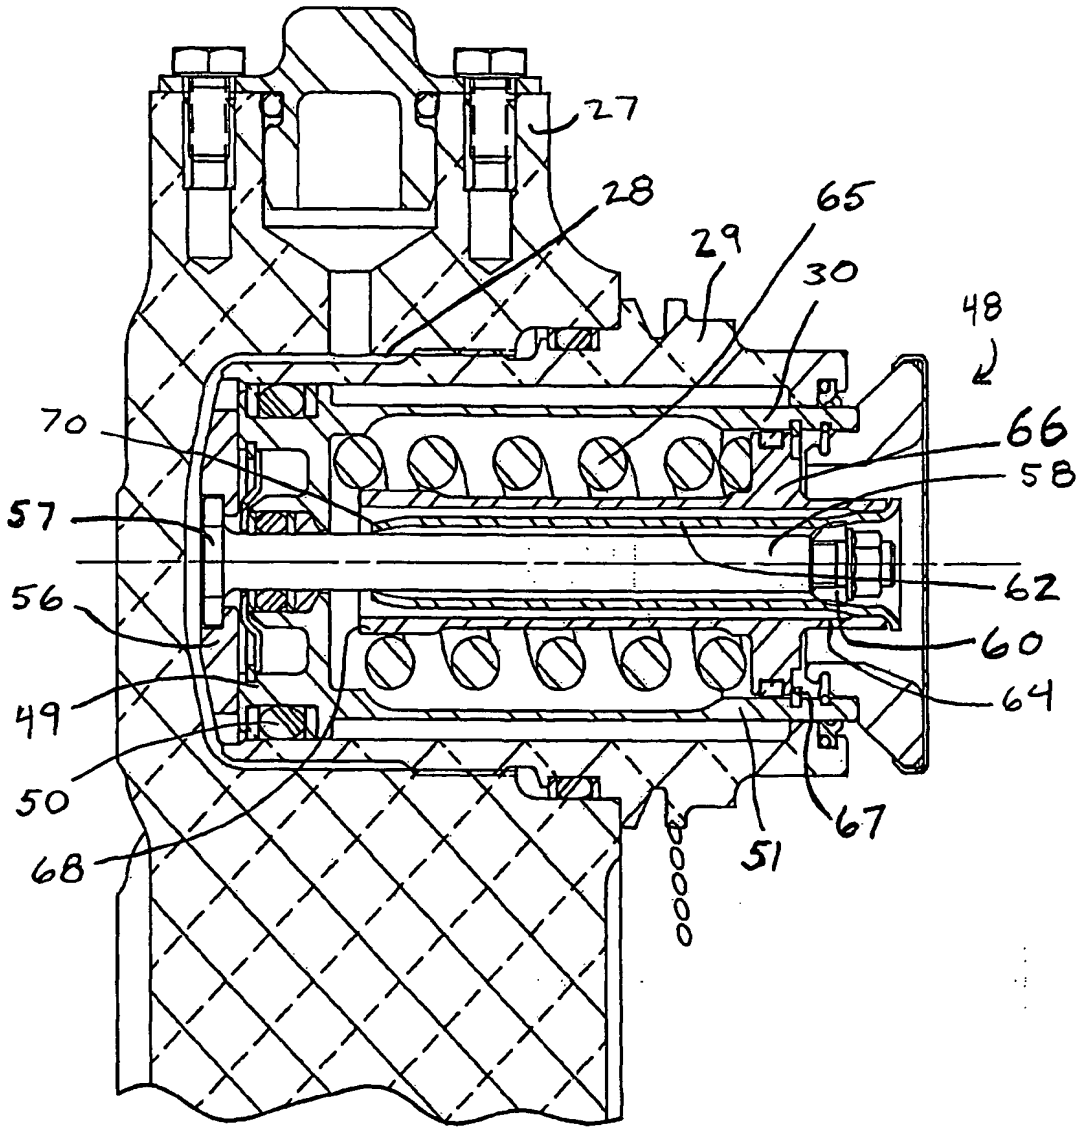

FIG. 2

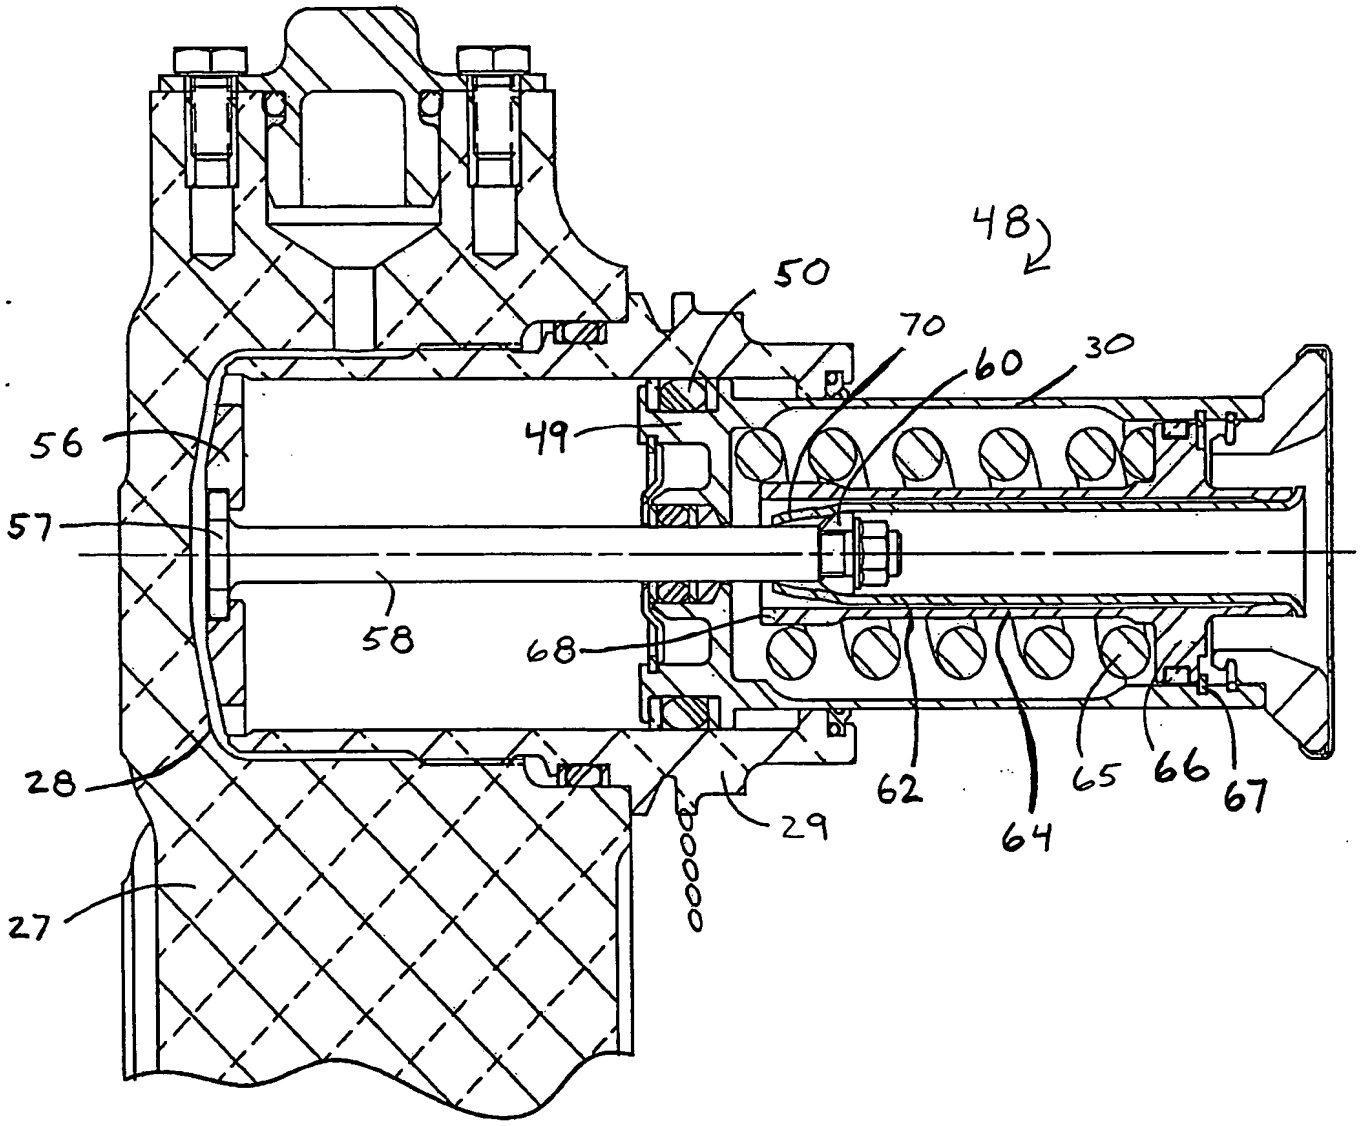

FIG. 3

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/026850

International filing date: 18 August 2004 (18.08.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/495,990
Filing date: 18 August 2003 (18.08.2003)

Date of receipt at the International Bureau: 04 October 2004 (04.10.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)

World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse